



Bollard Flexible with Base Plate

HFLEXP

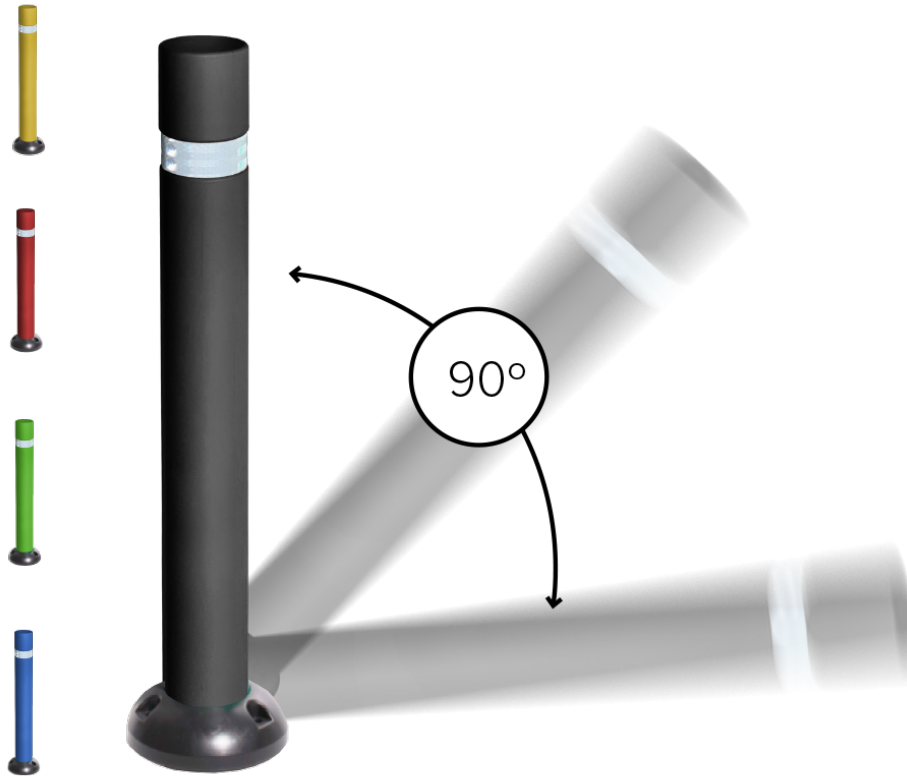

Bollard made of flexible black polyurethane resistant to UV rays with reflective band. With base plate for a bolt-on installation
 Manufactured in fixed and removable version with polyurethane or stainless steel base. Exceeds a flexion of 1500 cycles at 45° and 50 cycles at 90°, without damage.
 Class "E" in terms of fire behaviour according to the UNE-EN 13501-1:2007+A1:2010 standard.
 Resistant to -50° according to the UNE ISO 812 standard.




Ref.	Ø A	H	H1
HflexP	100	810	Ø195


The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

Recommended anchoring: by means of three Ø10 x 120mm bolts depending on the surface.
Optional:
- Other colours: red, green, yellow or blue.


ALTERNATIVES:

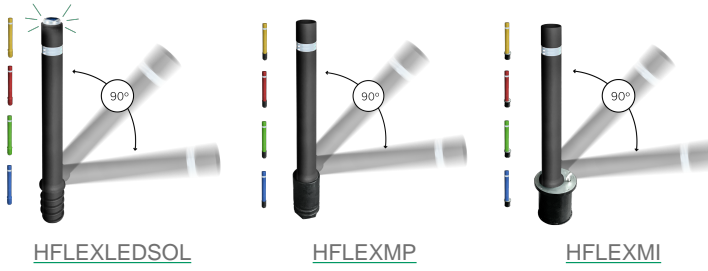

The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

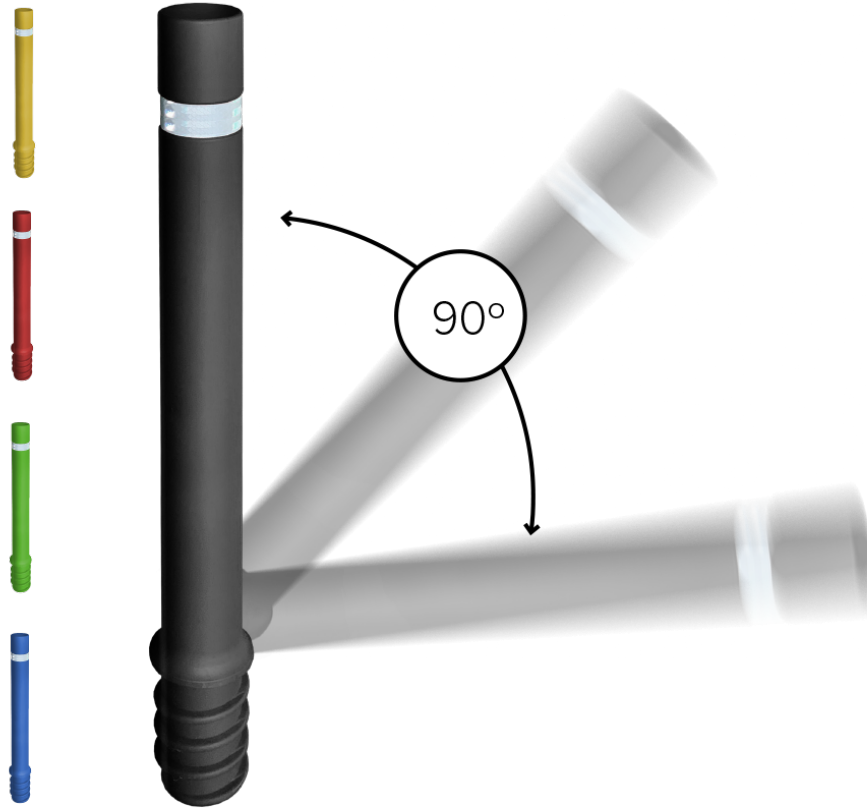

Bollard made of flexible black polyurethane, resistant to UV rays, with reflective band.
 Manufactured in fixed and removable version with polyurethane or stainless steel base.
 Exceeds a flexion of 1500 cycles at 45° and 50 cycles at 90°, without damage.
 Class "E" in terms of fire behaviour according to the UNE-EN 13501-1:2007+A1:2010 standard.
 Resistant to -50° according to the UNE ISO 812 standard.




Ref.	Ø A	H	H1
Hflex	100	1000	190



Recommended anchoring: embedded.
Optional:
- Other colours: red, green, yellow or blue.

ALTERNATIVES:

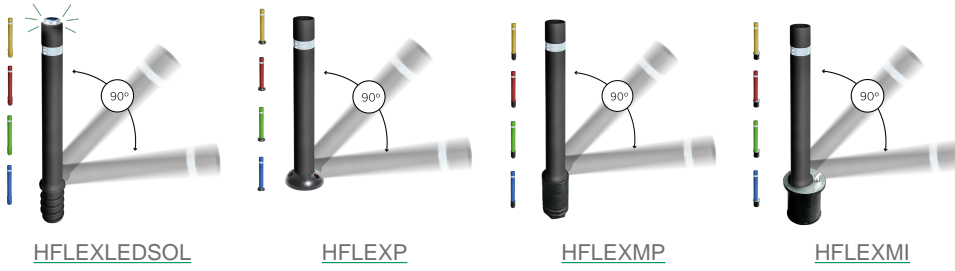

The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.