

692 Master Flex HHP™ D12

High heel modular entrance matting system



Dust Control Matting - Outdoor Contract & Installation Matting

692 Master Flex HHP™ D12

692 Master Flex HHP™ D12 high heel modular rubber mat tile has an open construction with tiny drainage holes and a depth of 12 mm.

- High heel modular entrance matting system
- Stylish octagonal grooved design and tiny integrated holes
- Smooth surface makes it EU compliant for public entrances and wheeled access
- Can be combined with the 693 Master Flex HHP™ C12 for a harmonious transition from outdoor to indoor

Recommended use

- Indoor/Outdoor
- For placement in interior or exterior recessed matwell frames
- Heavy traffic

Colors:


- Black

Sizes:

- 50cm x 50cm
- 50cm x 50cm

Accessories:

- 597 Master Flex™ D12/C12 Nitrile Safety Ramps

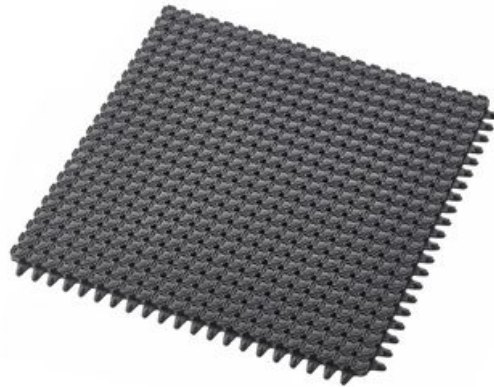

CRUSH RESISTANCE

RATING DUST CONTROL

B2 Athy Business Campus,
Athy,
Co. Kildare,
R14 PK74
01 5312777
sales@pittman.ie

pittman®

1310 Solihull Parkway,
Birmingham Business Park,
Birmingham,
B37 7YB
0121 630 3527
sales@pittman.uk

Dust Control Matting - Outdoor Contract & Installation Matting Master Flex HHP™ D12

General

Brand	Notrax
Category	Outdoor Contract & Installation Matting
Product Number	692
Product Family	Industrial & Commercial Matting
Product Group	Dust Control Matting
Product Name	Master Flex HHP™ D12
Recommended use	For placement in interior or exterior recessed matwell frames
Series	Masterflex™
Shipping Location	Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Indoor / Outdoor - Modular Entrance Mat Systems
Update trigger	20210310-1301
Usage Intensity	Heavy traffic

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Reach US	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Warranty	1

Tests

Fire rating US	Pass
----------------	------

Technical Specifications

Edges	Attachable bevelled edges are available
Material	Natural rubber
Material Group	Natural rubber
Process	Compression Moulding

693 Master Flex HHP™ C12

High heel modular entrance matting system



Dust Control Matting - Outdoor Contract & Installation Matting

693 Master Flex HHP™ C12

The 693 Master Flex HHP™ C12 high heel matting system can be completely personalized with a large selection of carpet inserts in a variety of colours.

- High heel modular entrance matting system
- Stylish octagonal grooved design and tiny integrated holes combined with a densely tufted carpet insert to reduce the risk of trips and falls with high heels
- Smooth surface makes it EU compliant for public entrance and suitable for wheeled access
- Can be combined with the Master Flex HHP™ D12 for a harmonious transition from outdoor to indoor

Recommended use

- Indoor/Outdoor
- For placement in interior or exterior recessed matwell frames
- Heavy traffic

Colors:

- Brown
- Blue
- Charcoal
- Granite
- Grey
- White

Sizes:

- 50cm X 50cm
- 50cm x 50cm

Accessories:

- 597 Master Flex™ D12/C12 Nitrile Safety Ramps



WATER RETENTION

CRUSH RESISTANCE

RATING DUST CONTROL

B2 Athy Business Campus,
Athy,
Co. Kildare,
R14 PK74
01 5312777
sales@pittman.ie

pittman®

1310 Solihull Parkway,
Birmingham Business Park,
Birmingham,
B37 7YB
0121 630 3527
sales@pittman.uk

Dust Control Matting - Outdoor Contract & Installation Matting

Master Flex HHP™ C12

General

Brand	Notrax
Category	Outdoor Contract & Installation Matting
Product Number	693
Product Family	Industrial & Commercial Matting
Product Group	Dust Control Matting
Product Name	Master Flex HHP™ C12
Recommended use	For placement in interior or exterior recessed matwell frames
Series	Masterflex™
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Indoor / Outdoor - Modular Entrance Mat Systems
Update trigger	20210310-1301
Usage Intensity	Heavy traffic

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Warranty	1

Tests

Fire rating US	Pass
----------------	------

Technical Specifications

Edges	Attachable bevelled edges are available
Material	Natural rubber
Material Group	Natural rubber
Process	Compression Moulding