

463 Skywalker HD™ ESD

ESD rubber tiles with a bubble pattern



Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories

463 Skywalker HD™ ESD

Heavy duty rubber tiles can be easily assembled for coverage of large areas or individual workstations. Ergonomic benefit derived from a 13 mm thick worker platform with a bubble pattern for maximum fatigue relief in dry industrial environments.

- The unique design and craftsmanship make the mat easy to handle and easy to install on site
- A tooled grid of 30 cm x 30 cm sections on the underside of the mat makes further customization quick and easy
- Attachable bevelled edges prevent tripping and allow inside and outside corners

Recommended use

- Dry Areas
- For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

Colors:


- Black

Sizes:

- 91cm x 91cm
- per m²

Accessories:

- 825-C
- 441 SkywalkerHD o-Curve™ Safety Ramp Nitrile
- 469 Skywalker HD Marking Line™
- 461 Skywalker HD™ Safety Ramp Nitrile
- 444 Skywalker HD o-Curve™ ESD Nitrile FR
- 434 Skywalker HD i-Curve™ ESD Nitrile FR
- 051 ESD Floor Grounding Cord

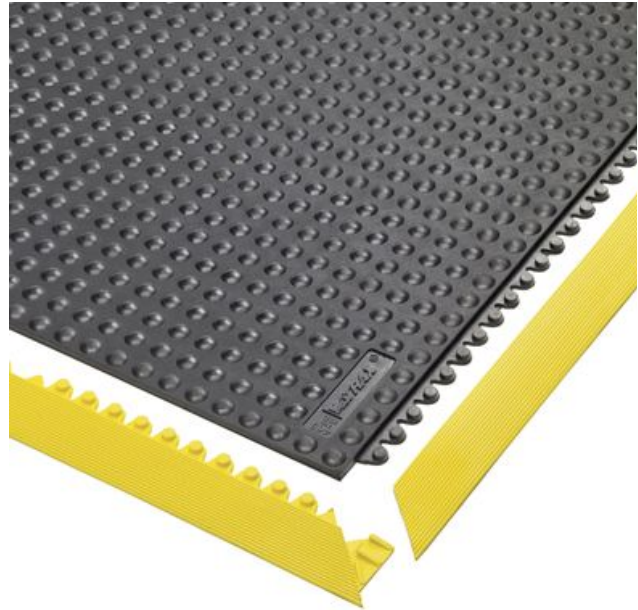

Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories

Skywalker HD™ ESD

General

Brand	Notrax
Category	ESD Matting & Accessories
Product Number	463
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Skywalker HD™ ESD
Recommended use	For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.
Series	Skywalker HD™
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Dry Areas - Modular Systems
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

Tests

Abrasion Resistance 1000	0.824
Elongation	210%
ESD Rg	Rg $10^6 - 10^9 \Omega$
ESD Rp	Rp $10^6 - 10^9 \Omega$
Fire rating US	Pass
Hardness	67 Shore A
Slip Rating	R9
Surface Flammability	Pass
Tear Strength	10.5 N/mm

Technical Specifications

Application	Industrial Environments
Breaking Load	4.80 Mpa
Edges	Attachable bevelled edges are available
Material	Static dissipative natural rubber
Material Group	Rubber
Process	Compression Moulding

464 Skywalker HD™ ESD Nitrile FR

ESD Nitrile FR rubber tiles with a bubble pattern



Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories

464 Skywalker HD™ ESD Nitrile FR

Heavy duty rubber tiles can be easily assembled for coverage of large areas or individual workstations. Ergonomic benefit derived from a 13 mm thick worker platform with a bubble pattern for maximum fatigue relief in dry industrial environments.

- The unique design and craftsmanship make the mat easy to handle and easy to install on site
- A tooled grid of 30 cm x 30 cm sections on the underside of the mat makes further customization quick and easy
- Attachable bevelled edges prevent tripping and allow inside and outside corners
- Resistant to most industrial oils and suitable for welding areas

Recommended use

- Dry Areas
- For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

Colors:


- Black

Sizes:

- 91cm x 91cm
- per m2

Accessories:

- 441 SkywalkerHD o-Curve™ Safety Ramp Nitrile
- 469 Skywalker HD Marking Line™
- 461 Skywalker HD™ Safety Ramp Nitrile
- 444 Skywalker HD o-Curve™ ESD Nitrile FR
- 434 Skywalker HD i-Curve™ ESD Nitrile FR
- 431 SkywalkerHD i-Curve™ Safety Ramp Nitrile

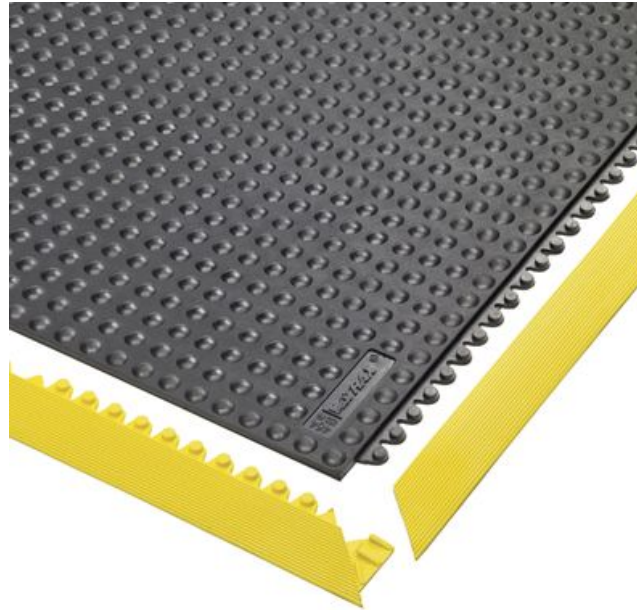

Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories

Skywalker HD™ ESD Nitrile FR

General

Brand	Notrax
Category	ESD Matting & Accessories
Product Number	464
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Skywalker HD™ ESD Nitrile FR
Recommended use	For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.
Series	Skywalker HD™
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands
Type	Dry Areas - Modular Systems
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Sustainability	Recyclable material
Warranty	1

Tests

Abrasion Resistance 1000	0.824
Elongation	210%
ESD Rg	Rg 10^6 - 10^9 Ω
ESD Rp	Rp 10^6 - 10^9 Ω
Fire rating EU	EN 13501-1 Bfl-S1
Hardness	67 Shore A
Slip Rating	R9
Surface Flammability	Pass
Tear Strength	10.5N/mm

Technical Specifications

Application	Industrial Environments
Breaking Load	4.80 Mpa
Edges	Attachable bevelled edges are available
Material	Static dissipative and fire retardant nitrile rubber compound
Material Group	Nitrile rubber
Process	Compression Moulding