



# 750 Rib'n'Roll™ 3 mm fine rib

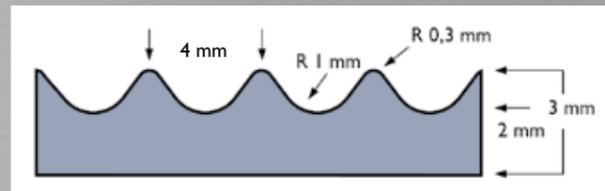

- Fine rubber rib profile runner of 3 mm thickness.
- Matting with excellent wear and tear resistance. Used as flooring, shelve liners and in all kinds of industrial applications in workshops, near machines and any place where objects may tend to slide on workbenches, carts, cars or lorry booths. Withstand diluted acids and alkalis.

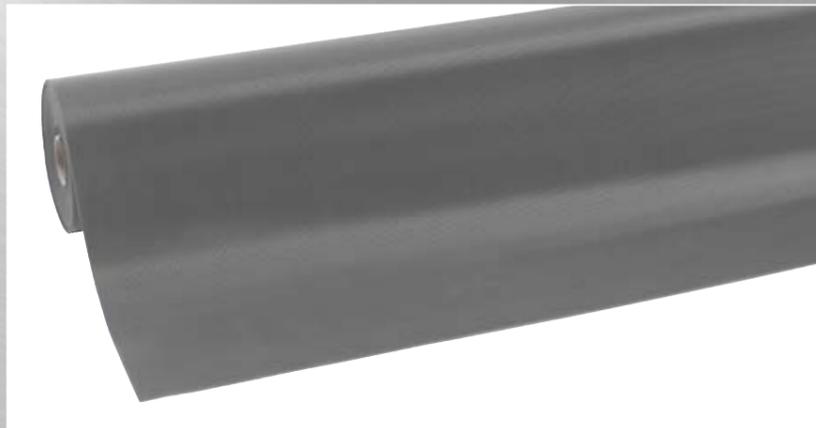

# 750 Rib'n'Roll™ 3 mm fine rib

PRODUCT SPECIFICATIONS	
Designation	Grooved Matting
Type	Flooring / runner
Description	Corrugated fine rib pattern surface
Material	Synthetic rubber
Process	Calendering
Category	Grooved pattern
Recommended use	Factory and warehouse premises or any kind of industrial applications to protect floors and materials.
Colours	Black, Grey
Weight	3.3 kg/m <sup>2</sup>
Thickness	3 mm
Standard sizes	Black: 100 cm x 10 m, 120 cm x 10 m Grey: 100 cm x 10 m
Custom sizes	Per linear meter
Special remarks	Black : resistance to temperature : -30°C, +70°C Grey : resistance to temperature : -20°C, +70°C

PRODUCT TESTING		
Tests	Norms	Results
Compression deflection	U.S.	
	1.4 kg/cm <sup>2</sup>	
	2.8 kg/cm <sup>2</sup>	
Foam battery	ASTM D3574	
Abrasion resistance	ASTM D3884-01	
	500 Cycles	
	5000 Cycles	0.2% weight loss
Static coefficient of friction	ASTM C1028-96	0.73
Elongation	DIN53504	250%
Breaking load	ASTM D412	
Tensile strength	DIN 53504	3.5 MPA
Hardness	DIN 53505	60 Shore A
Anti-slip	DIN 51130 and BG-RULE BGR181	
FIRE TESTING		
	Critical radiant flux	ASTM E-648
	Fire retardancy	DIN4102
		EN 13501-1
	Flammability test	ASTM D2859
	Classification of the reaction to fire	
ESD	ANSI ESD S7.1 50% Humidity	
Sustainability	<ul style="list-style-type: none"> <li>• Recyclable material</li> <li>• Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals)</li> </ul>	