


753 Rib'n'Roll™ 6 mm broad rib



- Broad rib rubber profile runner of 6 mm thickness.
- Matting with excellent wear and tear resistance. Used as flooring, shelf liners and in all kinds of industrial applications in workshops, near machines and any place where objects may tend to slide on workbenches, carts, cars or lorry booths. Withstand diluted acids and alkalis.

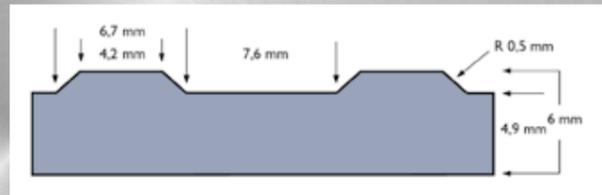

753 Rib'n'Roll™ 6 mm broad rib

PRODUCT SPECIFICATIONS		
Designation	Grooved Matting	
Type	Flooring / runner	
Description	Corrugated broad rib pattern surface	
Material	SBR rubber	
Process	Calendering	
Category	Grooved pattern	
Recommended use	Factory and warehouse premises or any kind of industrial applications to protect floors and materials.	
Colours	Black	
Weight	8 kg/m ²	
Thickness	6 mm	
Standard sizes	120 cm x 10 m	
Custom sizes	Per linear meter	
Special remarks		
PRODUCT TESTING		
Tests	Norms	Results
Compression deflection	U.S.	
	1.4 kg/cm ²	
	2.8 kg/cm ²	
Foam battery	ASTM D3574	
Abrasion resistance	ASTM D3884-01	
	500 Cycles	
	5000 Cycles	0.2% weight loss
Static coefficient of friction	ASTM C1028-96	0,73
Elongation	ASTM D412	250%
Breaking load	ASTM D412	
Graves tear strength	ASTM D 1004	3.5 MPA
Hardness	ASTM D2240-02	60 Shore A
Anti-slip	DIN 51130 and BG-RULE BGR181	
FIRE TESTING		
ESD	Critical radiant flux	ASTM E-648
	Fire retardancy	DIN4102
		EN 13501-1
	Flammability test	ASTM D2859
Classification of the reaction to fire reaction		
ESD	ANSI ESD S7.1 50% Humidity	
Sustainability	<ul style="list-style-type: none"> • Recyclable material • Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals) 	