


## 621 Diamond Flex Lok™ Solid

Diamond Flex Lok™ Solid modular PVC platform.

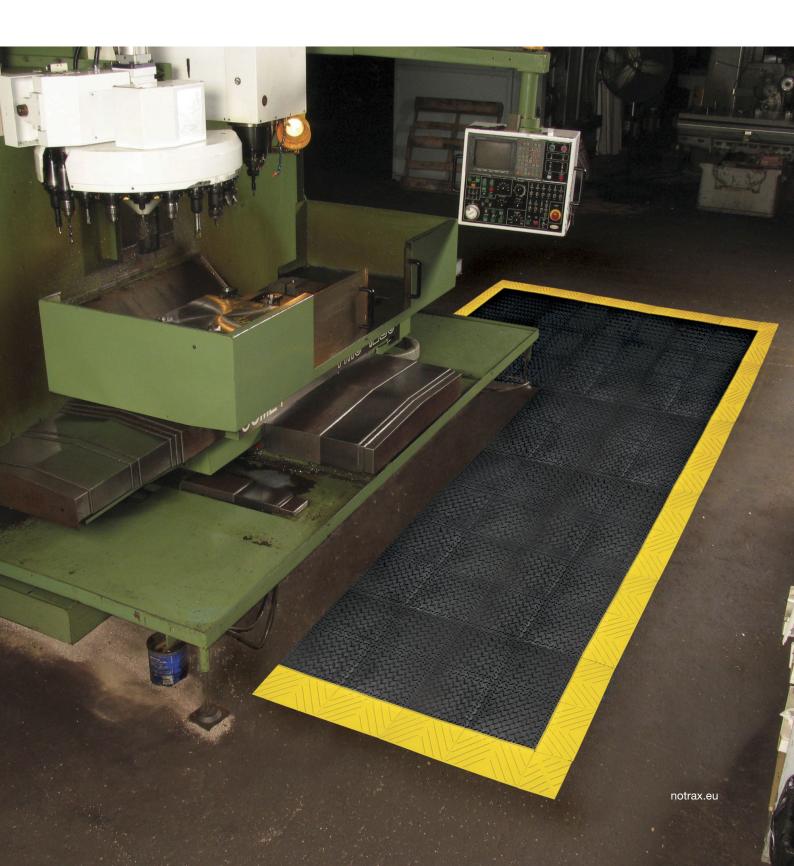

## Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 621 Diamond Flex Lok™ Solid

Sensational fatigue relief due to its unique "flex" design underneath. A permanent interlocking system ensures that the mat will not come apart.

- Custom-built according to your ideal floor mat in shape
- Anti-slip deck-plate surface design
- Bevelled ramps are available, eliminating trip hazards and allowing for easy access on to and off of the mat surface

### Recommended use

- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

### Colors:

- Black
- Black/Yellow

#### Sizes:

- 107cm x 152cm
- 107cm x 183cm
- 76cm x 152cm
- per m2

### Accessories:

- 621-Tile Diamond Flex Lok™ Solid Tile
- 621-Ramp Diamond Flex Lok™ Solid Bevel
- 621-Corner Diamond Flex Lok™ Solid Corner



WEAR RESISTANCE

SLIP RESISTANCE

**ANTI-FATIGUE** 























# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting Diamond Flex Lok™ Solid

### General

Brand	Notrax
Category	Dry Areas Modular Matting
Product Number	621
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Diamond Flex Lok™ Solid
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Moselle, MS 39459, United States
Туре	Dry Areas - Heavy Duty PVC Flooring
Update trigger	20210310-1301
Usage Intensity	Heavy duty

## Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

### **Tests**

Fire rating EU	En 13501-1 Cfl-S2
Foam Battery	40 lb/in²
Hardness	85 Shore A
Slip Rating	R10
Coefficient Friction Dry	0.69

## **Technical Specifications**

Process	Injection Moulding
Material Group	PVC
Material	PVC
Edges	Attachable bevelled edges are available
Application	Industrial Environments

