

MC Series Wheel Chocks

- Tough, weather-resistant polyurethane construction is resistant to oils, fuels, and solvents
- Meets MSHA specifications—the #1 choice for wheel chocks in the mining industry
- Larger base is ideal for heavy equipment such as haul trucks, loaders, and cranes



MC3011

- For mine haul trucks and mine support equipment
- For tire diameter 95 in to 165 in (241.3 cm to 419.1 cm)
- Use two MC3011 for gross vehicle operating weight up to 855,000 lbs (387,821 kg) or for payloads up to 240 tons* (217,724 kg)
- Use four MC3011 for gross vehicle operating weight up to 1,600,000 lbs (725,748 kg) or for payloads up to 400 tons* (362,874 kg)
- Recessed carrying handle and mounting hole for ropes, chains or brackets
- Replaceable rubber anti-slip traction pads with aluminum mounting plates to resist delamination due to corrosion
- Molded-in ANSI Z535.4 compliant proper chocking guidelines with color illustrations

* Ton is the U.S. standard, equivalent to 2,000 lb (907 kg)



Model	Length	Width	Height	Weight	Color	Prop 65
MC3011	24.6 in (62.5 cm)	14.5 in (36.9 cm)	16 in (40.7 cm)	32 lb (14.5 kg)	Hi-Vis Yellow	⚠
CT1911	12 in (30.5 cm)	24 in (61.0 cm)	49 in (124.5 cm)	33 lb (15 kg)	Gray	⚠
MCPAD22.875X2.5	Replacement traction pad for MC3011 and MC1911			2 lb (.9 kg)	Black	—

Note: Sizing is subject to a manufacturing variance of ±5%

MC3012

- For mine haul trucks and mine support equipment
- For tire diameter 95 in to 142 in (241.3 cm to 360.7 cm)
- Max gross vehicle operating weight up to 855,000 lb or 387,821 kg
- For payloads up to 255 tons* (231,332 kg) use two MC3012
- Recessed carrying handle and mounting hole for ropes, chains or brackets
- Replaceable rubber anti-slip traction pads with aluminum mounting plates to resist delamination due to corrosion
- Molded-in ANSI Z535.4 compliant proper chocking guidelines

* Ton is the U.S. standard, equivalent to 2,000 lb (907 kg)



Model	Length	Width	Height	Weight	Color	Prop 65
MC3012	21.9 in (55.7 cm)	14.9 in (37.9 cm)	10.6 in (27.0 cm)	23.75 lb (10.8 kg)	Yellow	⚠
CT1912	12.0 in (30.5 cm)	24.0 in (61 cm)	49.0 in (124.5 cm)	35 lb (15.9 kg)	Grey	⚠
MCPAD20.25X2.5	Replacement traction pad for MC3012 & MC1912			2 lb (5.0 kg)	Black	—
MCSTUD-3/8X1.5	Optional stainless steel studs for snow and ice. Requires 8 per MC3012 and MC1912			.06 lb (.027 kg) Each	Grey	—

Note: Sizing is subject to a manufacturing variance of ±5%


⚠ WARNING: This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

MC3010

- For mining and construction haul trucks and support equipment
- For tire diameter 65 in to 105 in (165.1 cm to 266.7 cm)
- Max gross vehicle operating weight up to 550,000 lb or 249,476 kg
- For payloads up to 165 tons* (149,685 kg) use two MC3010
- Recessed carrying handle and mounting hole for ropes, chains or brackets
- Replaceable rubber anti-slip traction pads with aluminum mounting plates to resist delamination due to corrosion

* Ton is the U.S. standard, equivalent to 2,000 lb (907 kg)




Model	Length	Width	Height	Weight	Color	Prop 65
MC3010	17.7 in (45.0 cm)	15.2 in (38.7 cm)	10 in (25.4 cm)	19 lb (8.62 kg)	Hi-Vis Yellow	
MCPAD15X.75X2.5	Replacement traction pad for MC3010 & MC1910			2 lb (5.0 kg)	Black	—
MCSTUD-3/8X1.5	Optional stainless steel studs for snow and ice. Requires 6 per MC3010 and MC1910			.5 lb (.23 kg)	Black	—


Note: Sizing is subject to a manufacturing variance of ±5%

MC3009

- For mine support equipment such as lubrication trucks and maintenance vehicles
- For tire diameter 46 in to 65 in (116.8 cm to 165.1 cm)
- Max gross vehicle operating weight up to 245,000 lb or 111,130 kg
- For payloads up to 70 tons* (63,503 kg) use two MC3009
- Recessed carrying handle and mounting hole for ropes, chains or brackets
- Replaceable rubber anti-slip traction pads with aluminum mounting plates to resist delamination due to corrosion
- Molded-in ANSI Z535.4 compliant proper chocking guidelines


* Ton is the U.S. standard, equivalent to 2,000 lb (907 kg)

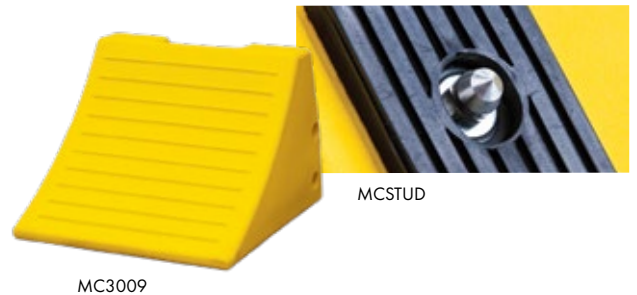


Model	Length	Width	Height	Weight	Color	Prop 65
MC3009	15 in (38.1 cm)	15.1 in (38.4 cm)	11 in (28.0 cm)	14.5 lb (6.6 kg)	Yellow	
MCPAD12X2.5	Replacement traction pad for MC3009 & MC1909			1.5 lb (.7 kg)	Black	—
MCSTUD-3/8X1.5	Optional stainless steel studs for snow and ice. Requires 4 per MC3009 and MC1909			.06 lb (.027 kg) Each	Grey	—

Note: Sizing is subject to a manufacturing variance of ±5%

MC Series Mounting Bracket for MC3011, MC3012, MC3010 & MC3009 chocks

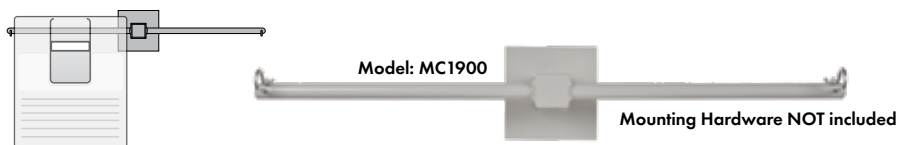

Model	Description	Specifications	Weight	Prop 65
MC1900	Universal Dual Mounting Bracket holds 2 each of MC Series Wheel Chocks. Primer Finish.	36 in (91.4 cm) Length. Bracket Rod with 6" (15.2 cm) Mounting Plate	16 lb (7.3 kg)	—

 **WARNING:** This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

