


592 Master Flex™ D12

Modular multi-zone entrance matting system

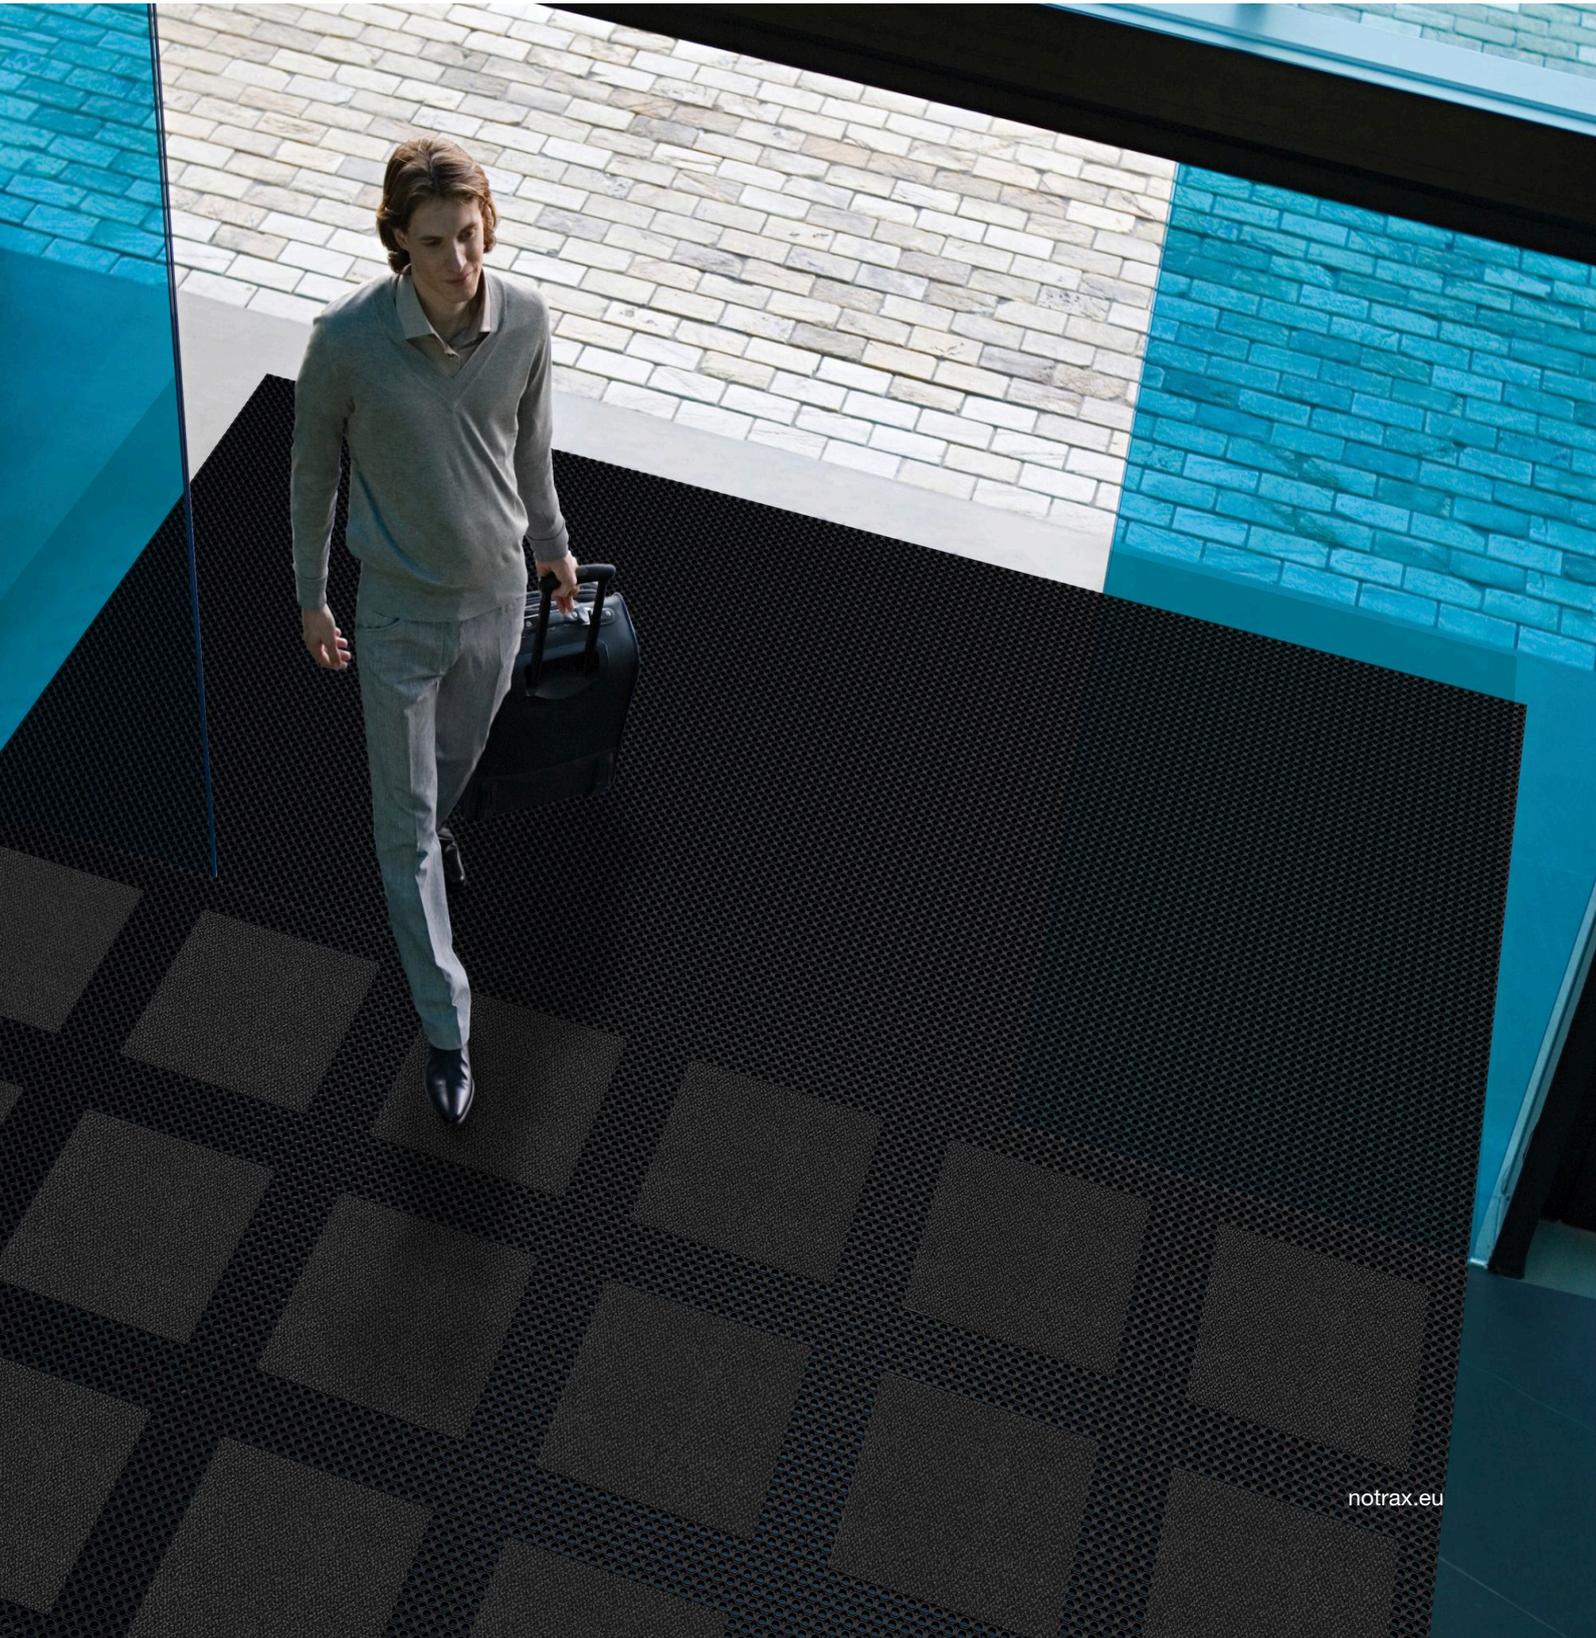

Dust Control Matting - Outdoor Contract & Installation Matting

592 Master Flex™ D12

The 592 Master Flex™ D12 modular rubber mat tile has an open construction with small drainage holes and a depth of 12 mm.

- Modular multi-zone entrance mat tile
- Stylish octagonal ring design with small holes that are EU compliant for public entrances
- Its smooth surface makes it the ideal mat for wheeled access
- Provides traction and excellent drainage in extreme weather conditions
- Connects seamlessly to Master Flex™ C12 which allows easy on-site installation and a smooth and harmonious transition from outdoor to indoor

Recommended use

- Indoor/Outdoor
- For placement in interior or exterior recessed matwell frames. Designed for pedestrian traffic, not suitable for extremely heavy loads.
- Heavy traffic

Colors:


- Black

Sizes:

- 50cm x 50cm
- 50cm x 50cm

Accessories:

- 597 Master Flex™ D12/C12 Nitrile Safety Ramps

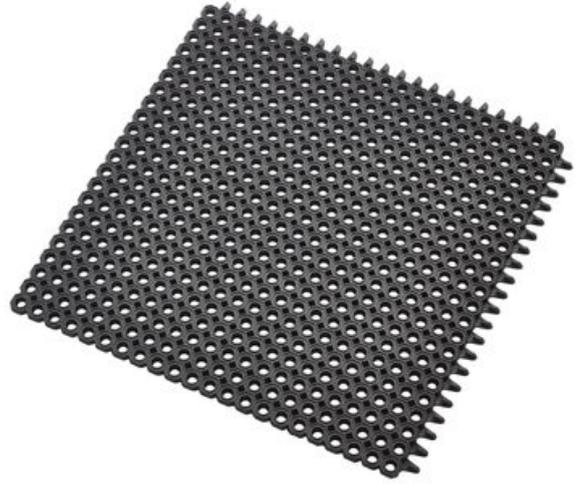

CRUSH RESISTANCE

RATING DUST CONTROL

B2 Athy Business Campus,
Athy,
Co. Kildare,
R14 PK74
01 5312777
sales@pittman.ie

pittman®

1310 Solihull Parkway,
Birmingham Business Park,
Birmingham,
B37 7YB
0121 630 3527
sales@pittman.uk

Dust Control Matting - Outdoor Contract & Installation Matting

Master Flex™ D12

General

Brand	Notrax
Category	Outdoor Contract & Installation Matting
Product Number	592
Product Family	Industrial & Commercial Matting
Product Group	Dust Control Matting
Product Name	Master Flex™ D12
Recommended use	For placement in interior or exterior recessed matwell frames. Designed for pedestrian traffic, not suitable for extremely heavy loads.
Series	Masterflex™
Shipping Location	Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Indoor / Outdoor - Modular Entrance Mat Systems
Update trigger	20210310-1301
Usage Intensity	Heavy traffic

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Reach US	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Warranty	1

Tests

Fire rating US	Pass
----------------	------

Technical Specifications

Edges	Attachable bevelled edges are available
Material	Natural rubber
Material Group	Natural rubber
Process	Compression Moulding

593 Master Flex™ C12

Modular multi-zone entrance matting system



Dust Control Matting - Outdoor Contract & Installation Matting

593 Master Flex™ C12

The 593 Master Flex™ C12 matting system can be completely personalized with a large selection of carpet inserts in a variety of colours.

- Modular multi-zone entrance mat tile
- Stylish octagonal ring design with small holes that are EU compliant for public entrances
- Its smooth surface makes it the ideal mat for wheeled access
- Provides traction and excellent drainage in extreme weather conditions
- Connects seamlessly to Master Flex™ D12 which allows easy on-site installation and a smooth and harmonious transition from outdoor to indoor

Recommended use

- Indoor/Outdoor
- For placement in interior or exterior recessed matwell frames. Designed for pedestrian traffic, not suitable for extremely heavy loads.
- Heavy traffic

Colors:


- Brown
- Blue
- Charcoal
- Green
- Granite
- Grey
- Red/Black
- White

Sizes:

- 50cm X 50cm
- 50cm x 50cm
- 50cm x 50cm

Accessories:

- 597 Master Flex™ D12/C12 Nitrile Safety Ramps

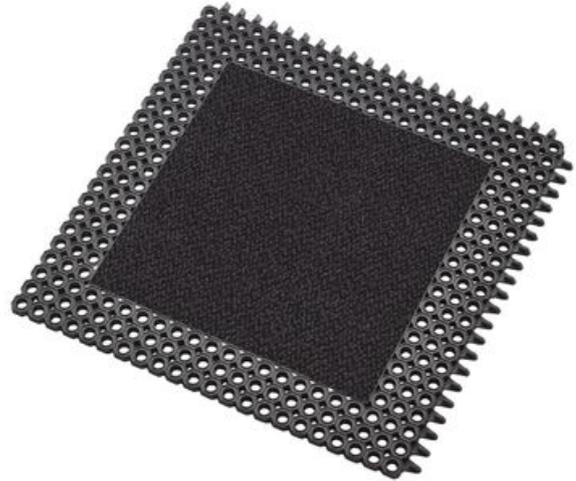

WATER RETENTION

CRUSH RESISTANCE

RATING DUST CONTROL

B2 Athy Business Campus,
Athy,
Co. Kildare,
R14 PK74
01 5312777
sales@pittman.ie

pittman®

1310 Solihull Parkway,
Birmingham Business Park,
Birmingham,
B37 7YB
0121 630 3527
sales@pittman.uk

Dust Control Matting - Outdoor Contract & Installation Matting

Master Flex™ C12

General

Brand	Notrax
Category	Outdoor Contract & Installation Matting
Product Number	593
Product Family	Industrial & Commercial Matting
Product Group	Dust Control Matting
Product Name	Master Flex™ C12
Recommended use	For placement in interior or exterior recessed matwell frames. Designed for pedestrian traffic, not suitable for extremely heavy loads.
Series	Masterflex™
Shipping Location	Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Indoor / Outdoor - Modular Entrance Mat Systems
Update trigger	20210310-1301
Usage Intensity	Heavy traffic

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Reach US	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

Tests

Fire rating US	Pass
----------------	------

Technical Specifications

Absorption Capacity	4
Edges	Attachable bevelled edges are available
Material	Natural rubber
Material Group	Natural rubber
Process	Compression Moulding