

pittman[®]

750 Rib 'n' Roll™



Ergonomic, Anti-fatigue & Safety Matting - Runners & Flooring

750 Rib 'n' Roll™ 3 mm fine rib

Durable rubber material with excellent wear and tear resistance. Used as flooring, shelf liners and in all kinds of industrial applications.

- SBR rubber
- Fine rib surface profile

Recommended use


- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Light duty

Colors:

- Black
- Grey

Sizes:

- 100cm x 1inm
- 120cm x 1inm
- 100cm x 10m
- 120cm x 10m

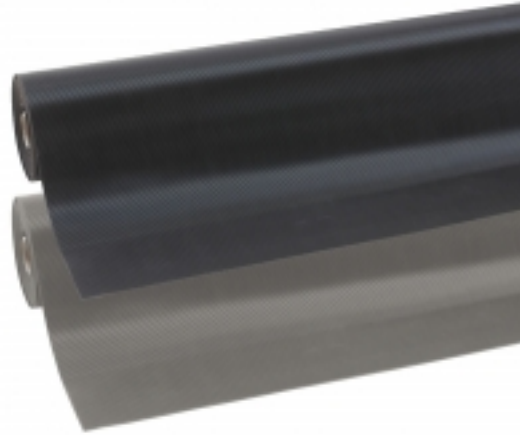

pittman®

Ergonomic, Anti-fatigue & Safety Matting - Runners & Flooring

Rib 'n' Roll™ 3 mm fine rib

General

Brand	Notrax
Category	Runners & Flooring
Product Number	750
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Rib 'n' Roll™ 3 mm fine rib
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Shipping Location	Barendrecht 2992SB, NL, Moselle, MS 39459, US
Type	Rubber Runners - Grooved
Update trigger	20210310-1301
Usage Intensity	Light duty

Sustainability

Reach	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Sustainability	Recyclable material
Warranty	5

Tests

Abrasion Resistance 1000	300-500 mm ³ / 0.2% weight loss @ 5000 cycles
Elongation	250%
Fire rating US	Pass
Hardness	60 Shore A
Coefficient Friction Dry	0.73
Surface Flammability	Pass
Tear Strength	3.5 Mpa

Technical Specifications

Application	Industrial Environments
Edges	No borders
Material	SBR Rubber
Material Group	Rubber
Process	Calendering
Temperature Range	- 40 ° C up to + 120 ° C



Ergonomic, Anti-fatigue & Safety Matting - Runners & Flooring

752 Rib 'n' Roll™ 3 mm broad rib

Durable rubber material with excellent wear and tear resistance. Used as flooring, shelf liners and in all kinds of industrial applications.

- SBR Rubber
- Broad rib surface profile

Recommended use



- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Light duty

Colors:

- Black

Sizes:

- 100cm x linm
- 120cm x linm
- 100cm x 10m
- 120cm x 10m

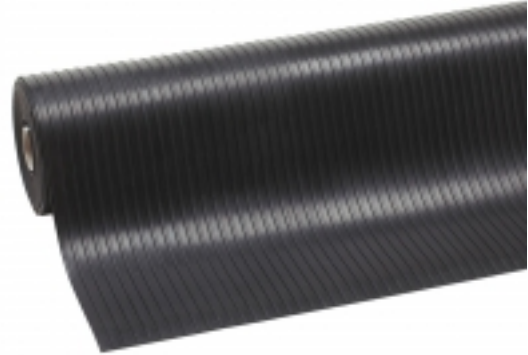

pittman®

Ergonomic, Anti-fatigue & Safety Matting - Runners & Flooring

Rib 'n' Roll™ 3 mm broad rib

General

Brand	Notrax
Category	Runners & Flooring
Product Number	752
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Rib 'n' Roll™ 3 mm broad rib
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Shipping Location	Barendrecht 2992SB, NL
Type	Rubber Runners - Grooved
Update trigger	20210310-1301
Usage Intensity	Light duty

Sustainability

Reach	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Sustainability	Recyclable material

Tests

Abrasion Resistance 1000	0.2% weight loss @ 5000 cycles
Elongation	250%
Hardness	60 Shore A
Coefficient Friction Dry	0.73
Surface Flammability	Pass
Tear Strength	3.5 Mpa

Technical Specifications

Application	Industrial Environments
Edges	No borders
Material	SBR Rubber
Material Group	Rubber
Process	Calendering
Temperature Range	- 40 ° C up to + 120 ° C



Ergonomic, Anti-fatigue & Safety Matting - Runners & Flooring

751 Rib 'n' Roll™ 6 mm fine rib

Durable rubber material with excellent wear and tear resistance. Used as flooring, shelf liners and in all kinds of industrial applications.

- SBR Rubber
- Fine rib surface profile

Recommended use


- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Light duty

Colors:

- Black

Sizes:

- 100cm x 10m
- 100 cm x 10 m



pittman®

Ergonomic, Anti-fatigue & Safety Matting - Runners & Flooring

Rib 'n' Roll™ 6 mm fine rib

General

Brand	Notrax
Category	Runners & Flooring
Product Number	751
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Rib 'n' Roll™ 6 mm fine rib
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Shipping Location	Barendrecht 2992SB, NL
Type	Rubber Runners - Grooved
Update trigger	20210310-1301
Usage Intensity	Light duty

Sustainability

Reach	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Sustainability	Recyclable material

Tests

Abrasion Resistance 1000	300-500 mm ³ 0.2% weight loss at 5000 cycles
Elongation	250%
Hardness	60 Shore A
Coefficient Friction Dry	0.72
Surface Flammability	Pass
Tear Strength	3.5 Mpa

Technical Specifications

Application	Industrial Environments
Edges	No borders
Material	SBR Rubber
Material Group	Rubber
Process	Calendering
Temperature Range	- 40 ° C up to + 120 ° C



Ergonomic, Anti-fatigue & Safety Matting - Runners & Flooring

753 Rib 'n' Roll™ 6 mm broad rib

Durable rubber material with excellent wear and tear resistance. Used as flooring, shelf liners and in all kinds of industrial applications.

- SBR Rubber
- Broad rib surface profile

Recommended use


- Dry Areas
- For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.
- Light duty

Colors:

- Black

Sizes:

- 120cm x 11m
- 120cm x 10m



pittman®

Ergonomic, Anti-fatigue & Safety Matting - Runners & Flooring

Rib 'n' Roll™ 6 mm broad rib

General

Brand	Notrax
Category	Runners & Flooring
Product Number	753
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Rib 'n' Roll™ 6 mm broad rib
Recommended use	For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.
Shipping Location	Barendrecht 2992SB, NL
Type	Rubber Runners - Grooved
Update trigger	20210310-1301
Usage Intensity	Light duty

Sustainability

Reach	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Sustainability	Recyclable material

Tests

Abrasion Resistance 1000	0.2% weight loss @ 5000 cycles
Elongation	250%
Hardness	60 Shore A
Coefficient Friction Dry	0.73
Surface Flammability	Pass
Tear Strength	3.5 Mpa

Technical Specifications

Application	Industrial Environments
Edges	No borders
Material	SBR Rubber
Material Group	Rubber
Process	Calendering
Temperature Range	- 40 ° C up to + 120 ° C

