

# 549 Safety Stance<sup>™</sup>

High quality anti-fatigue matting



# Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Modular Matting 549 Safety Stance™

High quality anti-fatigue matting for use in areas where there can be frequent oil spilling. Drainage holes and raised studs provide aeration and allow fluids and debris to fall through, leaving a dry and tidy top surface.

- Ergonomic benefit derived from 22 mm thick resilient worker platform
- Highly visible nitrile rubber orange coloured borders included on 3 sides for added safety
- Aggressive slip resistant surface

## Recommended use

- Wet/Dry and Oily Areas
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
- Heavy duty

## Colors:



- Black
- Black/Orange

## Sizes:

- 66cm x 102cm
- 90cm x 150cm
- 97cm x 163cm
- 97cm x 315cm
- per m2

## Accessories:

- 552 MD-X Ramp System™ Nitrile
- 549K Safety Stance™ Connectors
- 549N Safety Stance™ Ramps Nitrile 5 mm
- INS Installation Service Available on Request
- 551 MD Ramp System™ Nitrile

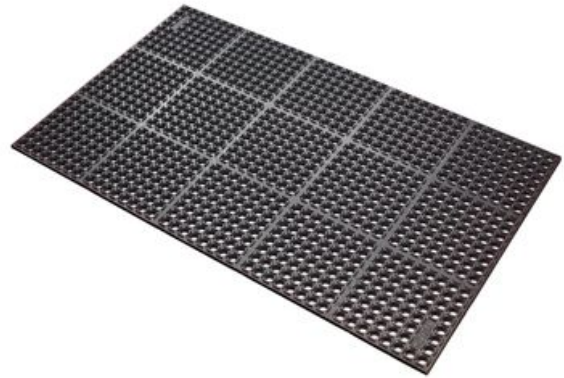

WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE

GOOD BETTER BEST



# Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Modular Matting Safety Stance™

## General

|                   |  |
|-------------------|--|
| Brand             | Notrax   |
| Category          | Wet Areas Modular Matting  |
| Product Number    | 549  |
| Product Family    | Industrial & Commercial Matting  |
| Product Group     | Ergonomic, Anti-fatigue & Safety Matting   |
| Product Name      | Safety Stance™   |
| Recommended use   | For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms |
| Shipping Location | Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States   |
| Type              | Wet / Oily Areas - Heavy Duty Nitrile Mats   |
| Update trigger    | 20210310-1301  |
| Usage Intensity   | Heavy duty   |

## Sustainability

|                  |   |
|------------------|---|
| REACH            | Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals). |
| Recycled         | True  |
| Rohs US          | Rohs compliant (Restriction of Hazardous Substances).                                   |
| Warranty (years) | 1   |

## Tests

|                          |            |
|--------------------------|------------|
| Abrasion Resistance 1000 | 3.1%       |
| Fire rating US           | Pass       |
| Hardness                 | 33 Shore A |
| Coefficient Friction Dry | 0.65       |
| Surface Flammability     | Pass       |

## Technical Specifications

|                |   |
|----------------|---|
| Application    | Industrial Environments                     |
| Breaking Load  | 258.2%                                      |
| Edges          | Orange coloured borders included on 3 sides |
| Material       | 100% Nitrile rubber                         |
| Material Group | Nitrile rubber                              |
| Process        | Compression Moulding                        |

B2 Athy Business Campus,  
Athy,  
Co. Kildare,  
R14 PK74  
01 5312777  
sales@pittman.ie

**pittman**®

1310 Solihull Parkway,  
Birmingham Business Park,  
Birmingham,  
B37 7YB  
0121 630 3527  
sales@pittman.uk