



SHEFFIELD CYCLE STAND - GALVANISED - SURFACE MOUNT

pittman[®]

OVERVIEW

The Sheffield Cycle Stand is designed to provide secure and reliable bike storage for public spaces, schools, universities, workplaces and commercial environments. Its practical design supports the entire bicycle and allows both the frame and wheels to be securely locked, helping to reduce the risk of theft and wheel damage.

Manufactured from hot-dip galvanised steel, the cycle stand provides excellent resistance to rust and corrosion for long-lasting outdoor use. Measuring 800mm high and 800mm wide with a 48mm diameter tube, its robust construction provides excellent stability for frequently used cycle parking areas.

Designed for straightforward surface-mount installation, the stand features integrated base plates that allow it to be bolted directly to the ground. This provides a secure installation without the need for excavation or casting into concrete, while individual stands can be positioned and spaced as required to suit different cycle parking layouts.


PRODUCT FEATURES

- Durable Galvanised Steel – Hot-dip galvanised finish provides excellent resistance to rust and corrosion.
- Secure Bike Storage – Allows cyclists to securely lock both the frame and wheels to the stand.
- Easy Bolt-Down Installation – Base plates allow the stand to be securely fixed directly to the surface.
- Flexible Layout – Individual stands can be positioned and spaced as required to suit the cycle parking area.

TECHNICAL DATA

SPECIFICATION	DETAILS
Product Code	SKU: 757130
Height	800 mm
Diameter	48.3 mm
Wall Thickness	2.5 mm
Width	800 mm
Material	Galvanised steel
Finish	Hot-dip
Capacity	Store up to 2 bikes per unit
Fixings	Fixings not required

DRAWINGS

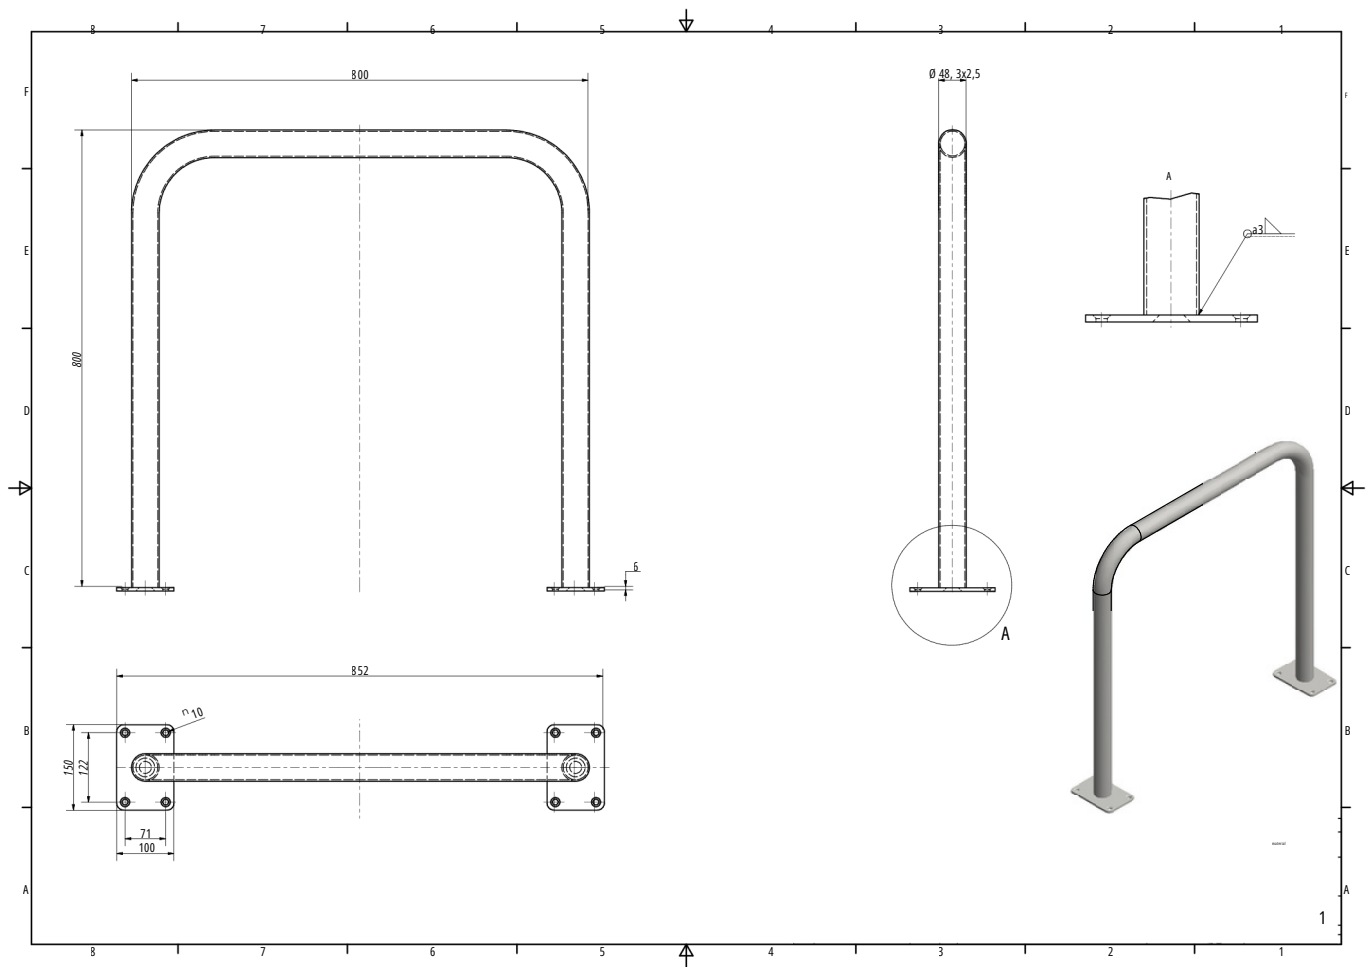

Sheffield Cycle Stand – Surface Mount Installation Instructions

1. Mark the area you are installing the cycle stands with a drill. For best results install onto a pre-existing concrete pad.
2. Drill the holes for the fixings using a 16mm drillbit. Drill down far enough for the fixing to be inserted into the plug (approximately 110mm deep).
3. Insert the rawplugs into the holes by hammering them into position. Make sure they are flush with the surface.
4. Once the rawplugs are in place reposition the cycle stand accordingly
5. Tighten the coacscrews into place the cycle stand is in a firm state.

Sheffield Cycle Stand – Sub-Surface Mount Installation option

1. Excavate 2no. 300 x 300mm square areas per Sheffield you are installing with approximately 300mm in depth
2. Insert the included anchors into the holes on the end of each leg
3. Place the cycle stand into the holes and ensure standing completely upright
4. Pour concrete mix into the holes to completely surround the legs at the bottom
5. Smooth out the areas around the base of the legs at the surface
6. Once complete leave the cycle stands to set in the concrete as per the cement manufacturers recommendations

