

# Skywalker HD™

Heavy duty rubber tiles with a bubble pattern



# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 460 Skywalker HD™

Heavy duty rubber tiles can be easily assembled for coverage of large areas or individual workstations. Ergonomic benefit derived from a 13 mm thick worker platform with a bubble pattern for maximum fatigue relief in dry industrial environments.

- 100% natural rubber compound
- A tooled grid of 30 cm x 30 cm sections on the underside of the mat makes further customization quick and easy
- Attachable bevelled edges prevent tripping and allow inside and outside corners

#### Recommended use

- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

#### Colors:


- Black

#### Sizes:

- 91cm x 91cm
- per m2

#### Accessories:

- INS INSTALLATION
- 440 Skywalker HD o-Curve™
- 469 Skywalker HD Marking Line™
- 461 Skywalker HD™ Safety Ramp Nitrile
- 430 Skywalker HD i-Curve™

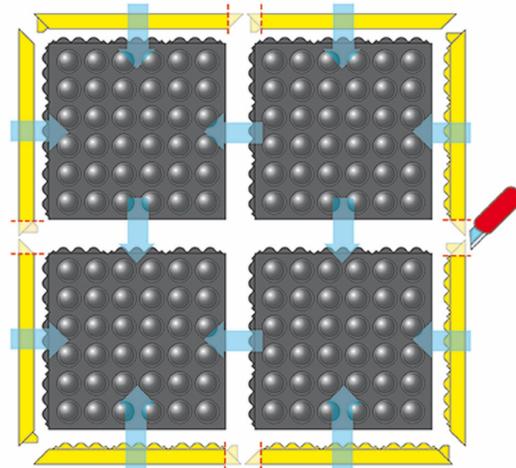

WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE



**pittman**®

# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting Skywalker HD™

## General

Brand	Notrax
Category	Dry Areas Modular Matting
Product Number	460
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Skywalker HD™
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Series	Skywalker HD™
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Dry Areas - Heavy Duty Modular Rubber Mats
Update trigger	20210310-1301
Usage Intensity	Heavy duty

## Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

## Tests

Abrasion Resistance 1000	0.824
Elongation	210%
Fire rating US	Pass
Hardness	67 Shore A
Slip Rating	R9
Surface Flammability	Pass
Tear Strength	10.5 N/mm



## Technical Specifications

Application	Industrial Environments
Breaking Load	4.80 Mpa
Edges	Attachable bevelled edges are available
Material	Natural rubber
Material Group	Natural rubber
Process	Compression Moulding
Temperature Range	- 40 ° C up to + 120 ° C



# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 462 Skywalker HD™ Nitrile

Heavy duty rubber tiles can be easily assembled for coverage of large areas or individual workstations. Ergonomic benefit derived from a 13 mm thick worker platform with a bubble pattern for maximum fatigue relief in dry industrial environments.

- The unique design and craftsmanship make the mat easy to handle and easy to install on site
- A tooled grid of 30 cm x 30 cm sections on the underside of the mat makes further customization quick and easy
- Attachable bevelled edges prevent tripping and allow inside and outside corners
- Resistant to most industrial oils

#### Recommended use

- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

#### Colors:


- Black

#### Sizes:

- 91cm x 91cm
- per m2

#### Accessories:

- INS INSTALLATION
- 441 SkywalkerHD o-Curve™ Safety Ramp Nitrile
- 469 Skywalker HD Marking Line™
- 461 Skywalker HD™ Safety Ramp Nitrile

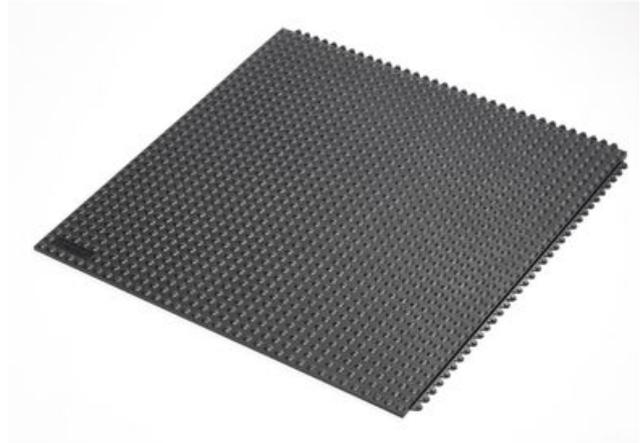

WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE



**pittman**®

# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting Skywalker HD™ Nitrile

## General

Brand	Notrax
Category	Dry Areas Modular Matting
Product Number	462
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Skywalker HD™ Nitrile
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Series	Skywalker HD™
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Dry Areas - Heavy Duty Modular Rubber Mats
Update trigger	20210310-1301
Usage Intensity	Heavy duty

## Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

## Tests

Abrasion Resistance 1000	0.739
Elongation	240%
Fire rating US	Pass
Hardness	68 Shore A
Slip Rating	R9
Surface Flammability	Pass
Tear Strength	19.53 N/mm



## Technical Specifications

Application	Industrial Environments
Breaking Load	5.50 Mpa
Edges	Attachable bevelled edges are available
Material	100% Nitrile rubber
Material Group	Nitrile rubber
Process	Compression Moulding



# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 465 Skywalker HD™ Nitrile FR

Heavy duty rubber tiles can be easily assembled for coverage of large areas or individual workstations. Ergonomic benefit derived from a 13 mm thick worker platform with a bubble pattern for maximum fatigue relief in dry industrial environments.

- The unique design and craftsmanship make the mat easy to handle and easy to install on site
- A tooled grid of 30 cm x 30 cm sections on the underside of the mat makes further customization quick and easy
- Attachable bevelled edges prevent tripping and allow inside and outside corners
- Resistant to most industrial oils and suitable for welding areas

#### Recommended use

- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

#### Colors:


- Black

#### Sizes:

- 91cm x 91cm
- per m2

#### Accessories:

- INS INSTALLATION
- 469 Skywalker HD Marking Line™
- 461 Skywalker HD™ Safety Ramp Nitrile

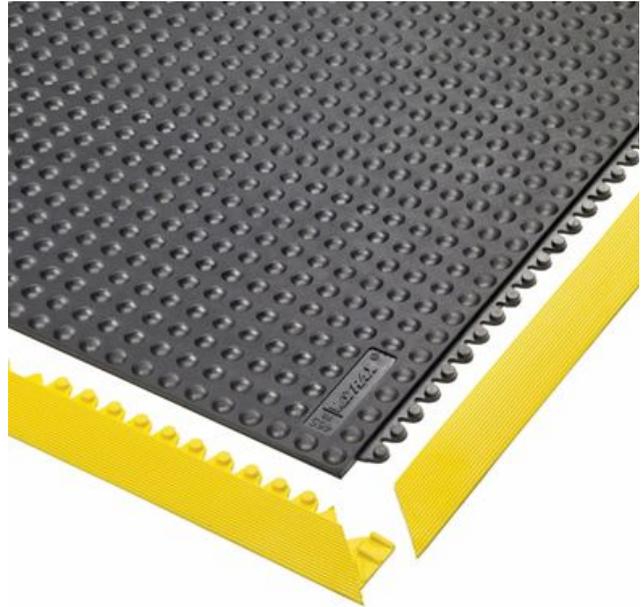

**pittman**®

# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting Skywalker HD™ Nitrile FR

## General

Brand	Notrax
Category	Dry Areas Modular Matting
Product Number	465
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Skywalker HD™ Nitrile FR
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Series	Skywalker HD™
Shipping Location	Chicago, IL 60638, United States, Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands
Type	Dry Areas - Heavy Duty Modular Rubber Mats
Update trigger	20210310-1301
Usage Intensity	Heavy duty

## Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

## Tests

Abrasion Resistance 1000	0.739
Elongation	240%
Fire rating EU	EN 13501-1 Bfl-S1
Fire rating US	Pass
Hardness	68 Shore A
Slip Rating	R9
Surface Flammability	Pass
Tear Strength	19.53 N/mm



## Technical Specifications

Application	Industrial Environments
Breaking Load	5.50 Mpa
Edges	Attachable bevelled edges are available
Material	100% nitrile fire retardant rubber compound
Material Group	Nitrile rubber
Process	Compression Moulding

