


750RS Rib'n'Roll™ 3 mm fine rib Resistant



- Fine rubber rib profile runner of 3 mm thickness.
- Greas resistant, nitrile rubber compound.
- Matting with excellent wear and tear resistance. Used as flooring, shelf liners and in all kinds of industrial applications in workshops, near machines and any place where objects may tend to slide on workbenches, carts, cars or lorry booths. Withstand diluted acids and alkalis.

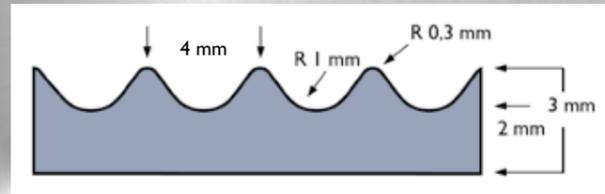

750RS Rib'n'Roll™ 3 mm fine rib Resistant

PRODUCT SPECIFICATIONS		
Designation	Grooved Matting	
Type	Flooring / runner	
Description	Corrugated fine rib pattern surface	
Material	Nitrile rubber, grease resistant	
Process	Calendering	
Category	Grooved pattern	
Recommended use	Factory and warehouse premises or any kind of industrial applications to protect floors and materials.	
Colours	Black	
Weight	3.3 kg/m ²	
Thickness	3 mm	
Standard sizes	100 cm x 10 m	
Custom sizes	Per linear meter	
Special remarks	Resistance to temperature : -30°C, +70°C	
PRODUCT TESTING		
Tests	Norms	Results
Compression deflection	U.S.	
	1.4 kg/cm ² 2.8 kg/cm ²	
Foam battery	ASTM D3574	
Abrasion resistance	ASTM D3884-01	
	500 Cycles 5000 Cycles	0.2% weight loss
Static coefficient of friction	ASTM C1028-96	0.73
Elongation	DIN53504	250%
Breaking load	ASTM D412	
Tensile strength	DIN 53504	3,5 MPA
Hardness	DIN 53505	60 Shore A
Anti-slip	DIN 51130 and BG-RULE BGR181	
FIRE TESTING		
	Critical radiant flux	ASTM E-648
	Fire retardancy	DIN4102
		EN 13501-1
Flammability test	ASTM D2859	
ESD	ANSI ESD S7.1 50% Humidity	
Sustainability	<ul style="list-style-type: none"> • Recyclable material • Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals) 	