


432 Skywalker HD Curve™ Nitrile

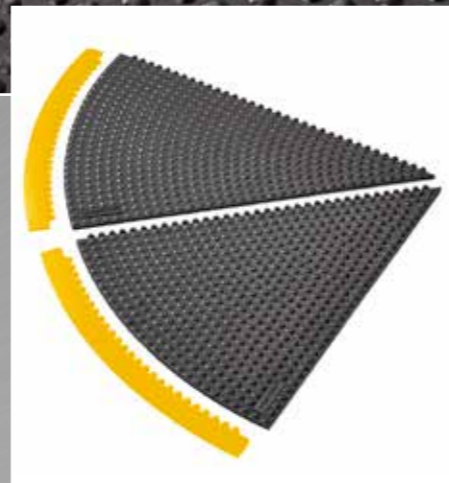

- 100% nitrile rubber compound resistant to most industrial oils.
- 45-degree wedge made of high quality rubber for maximum durability and excellent standing comfort.
- The bubble surface provides a sure footing and optimal ergonomic effects in stationary standing positions.
- The unique design and craftsmanship make the mat easy to handle and easy to install. Compatible with the Skywalker HD™ series, this interlocking 45-degree wedges of 91 cm length can be easily assembled for unique configurations for corners, S-curves, half-moons and complete circles.
- Attachable yellow or black ramps have curved bevelled edges to prevent tripping on the mat.
- Clean by sweeping or vacuuming.
- Designed to yield a long service life.
- Resistant to most chemicals and extreme temperatures.
- Free of silicone therefore safe for vehicle painting facilities.

432 Skywalker HD Curve™ Nitrile

PRODUCT SPECIFICATIONS			
Designation	Industrial matting		
Type	Anti-fatigue		
Description	Modular system		
Material	100% nitrile rubber compound		
Process	Compression moulding		
Category	Best		
Recommended use	Heavy duty – dry industrial environments		
Colours	Black		
Weight	4,3 kg/mat		
Thickness	13 mm		
Standard sizes	91 cm 45-degree curve		
Custom sizes	N/A		
Special remarks	Accessories: Skywalker HD Curve™ Ramp System™ male attachable bevels 91 cm yellow and black.		
PRODUCT TESTING			
Tests	Norms	Results	
Compression deflection	U.S.		
	1.4 kg/cm ²	ASTM D575	
	2.8 kg/cm ²	ASTM D575	
Foam battery	ASTM D3574		
Abrasion resistance	ASTM D3884-01		
	1000 Cycles		0.739
	5000 Cycles		
Static coefficient of friction	ASTM C1028-96		
Elongation	ASTM D412	240%	
Breaking load	ASTM D412	5.50 Mpa	
Graves tear strength	ASTM D 1004	19.53 N/mm	
Hardness	ASTM D2240-02	68 Shore A	
Anti-slip	DIN 51130 and BG-RULE BGR181	R9	
FIRE TESTING			
Critical radiant flux	ASTM E-648		
	DIN4102		
	EN 13501-1		
Flammability test	ASTM D2859	5 min.	
ESD	ANSI ESD S7.1 50% Humidity		
Sustainability	<ul style="list-style-type: none"> • Recyclable material • Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals) 		