


# 442 Skywalker HD o-Curve™ Nitrile

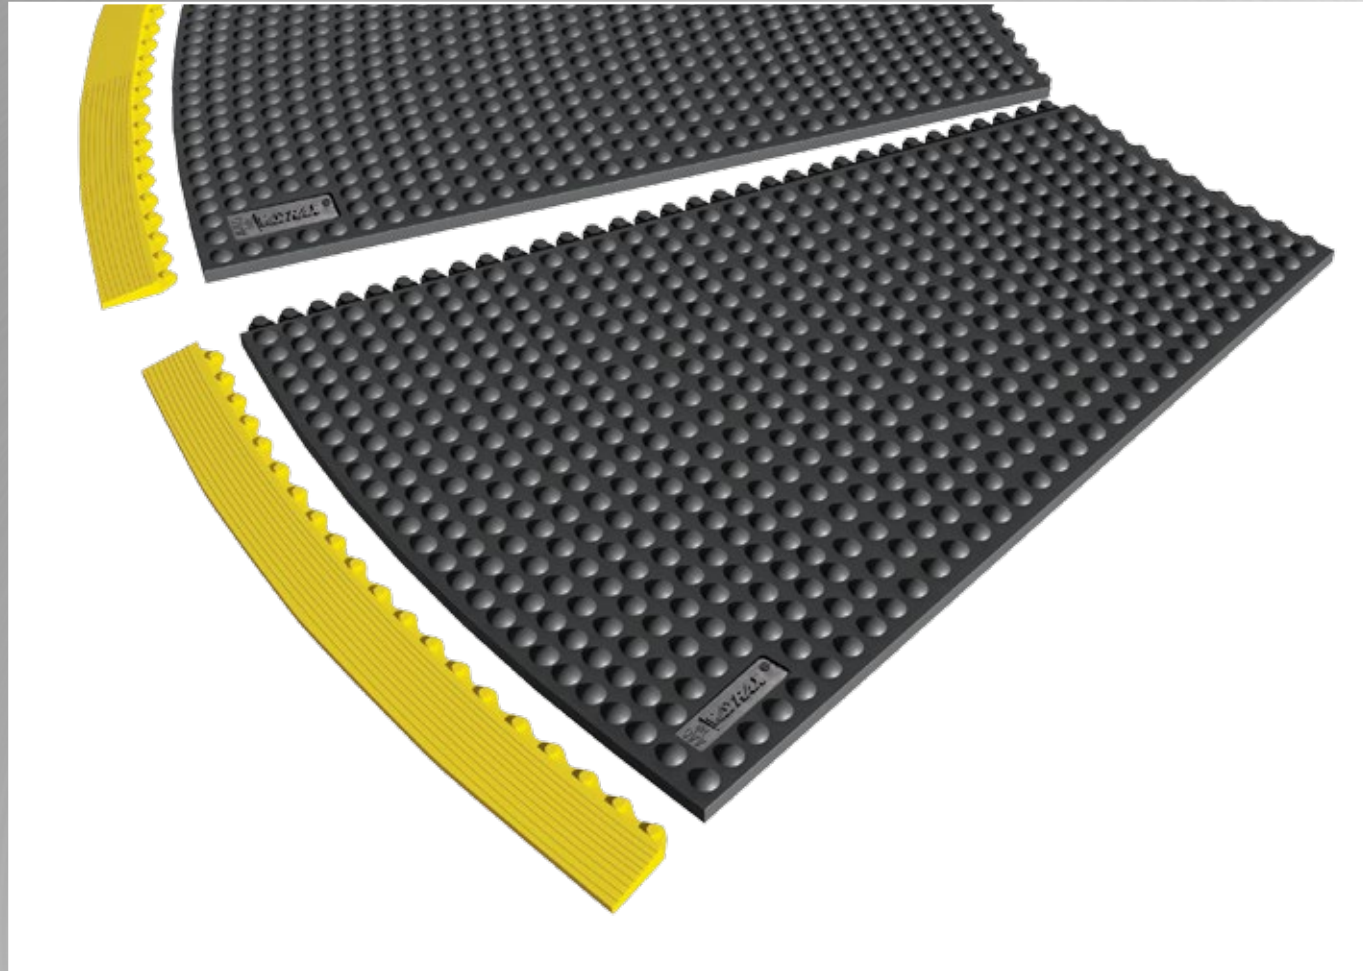

- 100% nitrile rubber compound resistant to most industrial oils.
- 22.5-degree outer curve wedge made of high quality rubber for maximum durability and excellent standing comfort.
- The bubble surface provides a sure footing and optimal ergonomic effects in stationary standing positions.
- The unique design and craftsmanship make the mat easy to handle and easy to install. Compatible with the Skywalker HD™ series, this interlocking 22.5-degree outer curve of 91 cm length can be easily assembled for unique configurations for corners, S-curves, half-moons and complete circles.
- Attachable yellow or black ramps have curved inner and outer bevelled edges to prevent tripping on the mat.
- Clean by sweeping or vacuuming.
- Designed to yield a long service life.
- Resistant to most chemicals.
- Free of silicone therefore safe for vehicle painting facilities.

# 442 Skywalker HD o-Curve™ Nitrile

PRODUCT SPECIFICATIONS			
Designation	Industrial matting		
Type	Anti-fatigue		
Description	Modular system		
Material	100% nitrile rubber resistant to most industrial oils		
Process	Compression moulding		
Category	Best		
Recommended use	Heavy duty – dry industrial environments		
Colours	Black		
Weight	6.4 kg/mat		
Thickness	13 mm		
Standard sizes	91 cm 22.5 degree outer curve		
Custom sizes	N/A		
Special remarks	Accessories: 441 Skywalker HD o-Curve™ Ramp System™ male outer bevel and femal inner bevel yellow and black.		
PRODUCT TESTING			
Tests	Norms	Results	
Compression deflection	U.S.		
	ASTM D575		
	ASTM D575		
Foam battery	ASTM D3574		
Abrasion resistance	ASTM D3884-01		
	1000 Cycles		0.824
	5000 Cycles		
Static coefficient of friction	ASTM C1028-96		
Elongation	DIN 53455-6-4	210%	
Breaking load	ASTM D412	4.80 Mpa	
Graves tear strength	ASTM D 1004	10.5 N/mm	
Hardness	ASTM D2240-02	67 Shore A	
Anti-slip	DIN 51130 and BG-RULE BGR181	R9	
FIRE TESTING			
	Critical radiant flux	ASTM E-648	
	Fire retardancy	DIN4102	
		EN 13501-1	
	Flammability test	ASTM D2859	5 min.
ESD	ANSI ESD S7.1 50% Humidity		
Sustainability	<ul style="list-style-type: none"> <li>• Recyclable material</li> <li>• Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals)</li> </ul>		