


# 469 Skywalker HD Yellow™



- Yellow safety line ideal for marking safety zones, walkways or safety limits.
- Heavy duty nitrile rubber compound for industrial strength is resistant to most industrial oils.
- The bubble surface provides a sure footing and optimal ergonomic effects in stationary standing positions.
- The unique design and craftsmanship make the mat easy to handle and easy to install. Compatible with the Skywalker HD™ series, this line of 91 cm x 10 cm length can be easily assembled for unique configurations and coverage of large areas.
- Clean by sweeping or vacuuming.
- Designed to yield a long service life.
- Resistant to most chemicals.
- Free of silicone therefore safe for vehicle painting facilities.

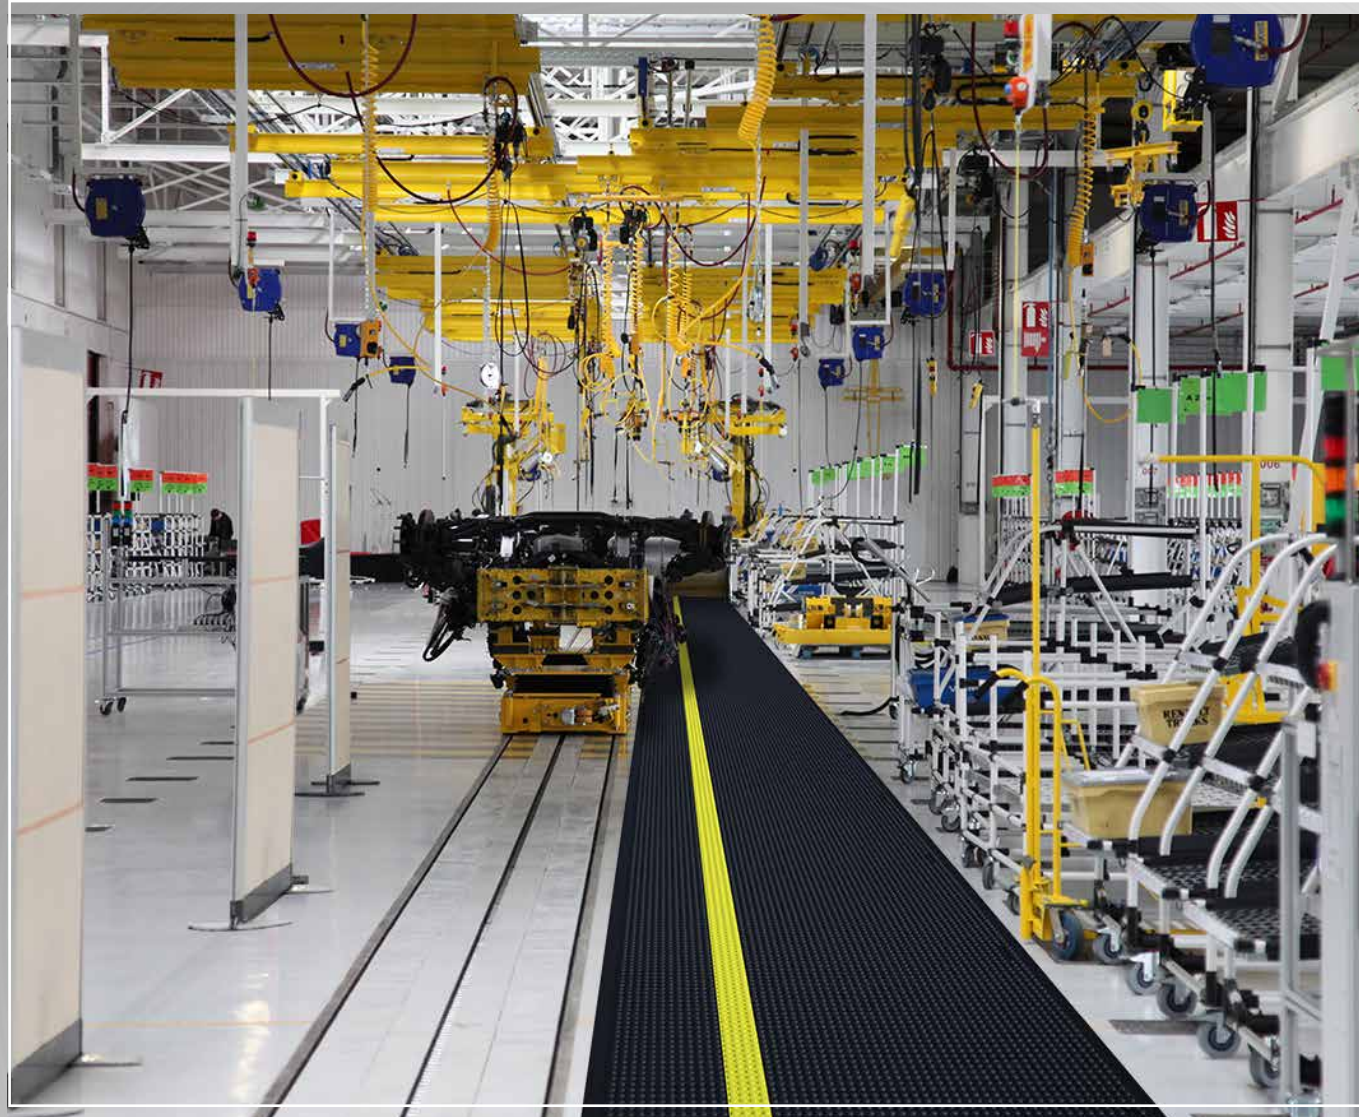

# 469 Skywalker HD Yellow™

PRODUCT SPECIFICATIONS			
Designation	Industrial matting		
Type	Yellow Safety Line		
Description	Modular system		
Material	100% nitrile rubber compound		
Process	Compression moulding		
Category	Best		
Recommended use	Heavy duty – dry industrial environments		
Colours	Yellow		
Weight	1,1 kg/mat		
Thickness	13 mm		
Standard sizes	91 cm x 10 cm		
Custom sizes	N/A		
Special remarks			
PRODUCT TESTING			
	Tests	Norms	Results
Compression deflection		U.S.	
	1.4 kg/cm <sup>2</sup>	ASTM D575	
	2.8 kg/cm <sup>2</sup>	ASTM D575	
Foam battery		ASTM D3574	
Abrasion resistance		ASTM D3884-01	
	1000 Cycles		0.739
	5000 Cycles		
Static coefficient of friction		ASTM C1028-96	
Elongation		ASTM D412	240%
Breaking load		ASTM D412	5.50 Mpa
Graves tear strength		ASTM D 1004	19.53 N/mm
Hardness		ASTM D2240-02	68 Shore A
Anti-slip		DIN 51130 and BG-RULE BGR181	R9
FIRE TESTING			
	Critical radiant flux	ASTM E-648	
	Fire retardancy	DIN4102	
		EN 13501-1	
	Flammability test	ASTM D2859	5 min.
ESD		ANSI ESD S7.1 50% Humidity	
Sustainability		<ul style="list-style-type: none"> <li>• Recyclable material</li> <li>• Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals)</li> </ul>	