

413 Gripper Sof-Tred™

Dyna-Shield™ layer with lengthwise corrugated rib pattern



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Linear Lengths 413 Gripper Sof-Tred™

Exceptional worker comfort due to 12.7 mm thick specially formulated compound. Protective layer of exclusive Dyna-Shield™ extends service life by 50% compared to regular microcellular vinyl.

- Lengthwise corrugated rib pattern for sure footing
- All 4 sides are bevelled and sealed to minimize tripping hazards
- Slip resistance R10 according to DIN51130 and BG-rule BGR181

Recommended use


- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Medium duty

Colors:

- Black/Yellow
- Grey

Sizes:


- 60cm x 91cm
- 91cm x 150cm
- 122cm x 18.3m
- 60cm x 18.3m
- 91cm x 18.3m

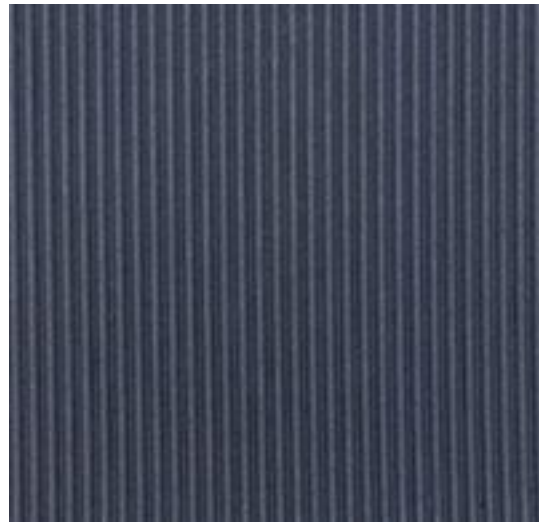

WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Linear Lengths Gripper Sof-Tred™

General

Brand	Notrax
Category	Dry Areas Linear Lengths
Product Number	413
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Gripper Sof-Tred™
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Moselle, MS 39459, United States
Type	Dry Areas - Dyna Shield™
Update trigger	20210310-1301
Usage Intensity	Medium duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

Tests

Abrasion Resistance 1000	4.9%
Abrasion Resistance 500	2.15%
Compression Deflection 1.4	0.62 cm
Compression Deflection 2.8	0.77 cm
Elongation	126%
Fire rating US	Pass
Foam Battery	40 lb/in ²
Hardness	15 Shore A
Slip Rating	R10
Coefficient Friction Dry	1.00
Surface Flammability	Pass
Tear Strength	10.6 lb

Technical Specifications

Application	Industrial Environments
Breaking Load	24.5 lb
Edges	Bevelled edges on all sides
Material	Microcellular vinyl
Material Group	Vinyl
Process	Foaming

B2 Athy Business Campus,
Athy,
Co. Kildare,
R14 PK74
01 5312777
sales@pittman.ie



1310 Solihull Parkway,
Birmingham Business Park,
Birmingham,
B37 7YB
0121 630 3527
sales@pittman.uk